



EN8090

High Definition MPEG-4 AVC Encoder

TANDBERG Television leads the market in deploying MPEG-4 AVC HD Encoders. The EN8090 is our second generation MPEG-4 AVC HD encoder and uses TANDBERG Television's second generation Intelligent Compression Engine technology featuring Clarus™ video pre-processing, with enhanced noise reduction, artifact removal and improved filtering. It redefines the economics of HD transmission and provides major improvements in picture quality, offering crisp, vibrant video at extremely low bitrates. New image-enhancing techniques such as single-slice video processing architecture, multi-pass analysis and forward-looking encoding also improve efficiencies and reduce bandwidth usage. Combined with TANDBERG Television's Reflex™ statistical multiplexing, the EN8090 can achieve efficiency improvements of 50% over previous generations of MPEG-4 AVC HD.

The EN8090 provides the highest quality HD encoding, letting you see the emotions, the dynamism and vibrancy of colors and feel as if you were a part of the action. The EN8090 uses a comprehensive toolset of performance boosting advanced compression video processing features and increased processing power. This new generation of HD encoding delivers more HD video and audio channels in the available bandwidth, enabling the launch of additional HD services in an existing network.

PRODUCT OVERVIEW

Extraordinary Picture Quality and Significant Bandwidth Liberation for Higher Performance Encoding

The EN8090 encoder excels in encoding performance. Supporting a range of horizontal resolutions at 1080i and 720p, extraordinary picture quality is supported at under 6 Mbit/s with improved visible artifact removal. This new level of performance represents up to a 50% improvement over currently deployed MPEG-4 AVC HD encoders, enabling operators to pack more services into the available bandwidth without sacrificing video quality.

Comprehensive Simulcasting, Encoding and Operational Options

Designed for seamless integration into satellite, cable and terrestrial infrastructures, the EN8090 has a single-channel form factor, but supports dual-resolution encoding. This enables MPEG-4 AVC SD and HD simulcast of the same input source within the same device, an enabler for operators with hybrid SD and HD infrastructures. The EN8090 offers Variable Bitrate (VBR) and Constant Bitrate (CBR) modes, Reflex™ multi-pass statistical multiplexing; direct IP multicasting, and simultaneous PiP stream generation.

Simple Migration Path from EN8030 MPEG-4 AVC SD to HD

The EN8090 is based on the same form factor as TANDBERG Television's EN8030 MPEG-4 AVC SD encoder. The EN8030 can be efficiently upgraded to the EN8090 whenever a service provider is ready to add HD services. This allows service providers to get started with SD and migrate to HD without costly new equipment purchases.

Experienced Integration and Interoperability with Leading HD Receivers

Service providers can reap the full revenue-enhancing benefits of advanced HD encoding and get new services to market immediately because the EN8090 has been fully-tested and pre-integrated with the leading HD receivers on the market in two years of field deployments and lab tests.

BASE UNIT FEATURES

EN8090 Encoder (EN8090/BAS)

The EN8090 can operate as an SD only encoder using SD inputs

- MPEG-4 AVC HD real-time video encoding:
 - High profile compliant at Level 4 (HP@L4)
 - HD-SDI video input
 - Constant bitrate encoding from 1 Mbit/s to 20 Mbit/s
- MPEG-4 AVC SD real-time video encoding:
 - Main profile at Level 3 (MP@L3) support
 - SDI and analog video inputs
 - Constant bitrate encoding from 0.250 Mbit/s to 10 Mbit/s
- Simultaneous SD MPEG-2 encoding with E5710 features (option)
- Extensive video pre-processing for optimum picture quality whatever the source
- Variable bitrate and Reflex™ statistical multiplexing support (option)
- Stereo Audio Encoding:
 - MPEG-1 Layer II and Dolby Digital® (AC-3)
 - Options for advanced audio and multi-channel encoding
 - Digital, analog and Serial Digital embedded inputs
- Control and monitoring via web browser, front panel, or TANDBERG nCompass Control
- MPEG-2 transport stream (ASI) output
- Dual IP NIC output (option)

EN8090 Encoder (EN8090/BAS/48V)

- As EN8090/BAS except with –48Vdc power supply

SOFTWARE OPTIONS

Clarus™ Noise Reduction (EN8000/SWO/NR)

- Improves picture quality and reduces bitrate requirement
- Fully adaptive spatial, temporal noise reduction
- Input processing and filtering

Clarus™ Input De-Blocking Filter (EN8000/SWO/DBF)

- Reduces macro block noise introduced by previous encoder
- Improves picture quality and reduces bitrate requirement (check availability)

Advanced Audio Coding on ICE3 (EN8000/SWO/ICE3AAC)

- Enables 1 or 2 stereo pairs of MPEG-2 AAC-LC (Low Complexity) or MPEG-4 (High Efficiency) HE-AACv1 or HE-AAC v2 audio encoding

Advanced Audio Coding on the Audio option module (EN8000/SWO/AAC)

- Enables 1 to 4 stereo pairs of MPEG-2 AAC-LC (Low Complexity) or MPEG-4 (High Efficiency) HE-AAC v1 or HE-AAC v2 audio encoding. 3 stereo pairs enables 5.1 surround sound encoding
- Requires EN8000/HDC/AUD

Variable Bitrate Operation (EN8000/SWO/REFLEX)

- Enables Reflex statistical multiplexing between multiple encoders as part of a multiplex based system
- Enables standalone automatic variable bitrate video generation based on user configurable target quality and maximum bitrate settings

Dolby Digital® (AC-3) Audio coding (EN8000/SWO/AC3)

- Enables 2 stereo pairs of Dolby Digital® (AC-3) audio encoding

ProMPEG FEC (EN8000/SWO/PROFEC)

- Enables ProMPEG FEC protection in the Dual IP output card for robust IP streaming

Simultaneous Picture-in-Picture Video Service Encoding (EN8000/SWO/PIP)

- Simultaneous encoding of low resolution version of main video service
- MPEG-4 AVC real-time encoding
- User selectable resolution and bitrate
- Single box solution for PIP functionality in IPTV applications
- Supports PIP service from 96 x 96 up to 352 x 288/240 resolution

Simultaneous Picture-in-Picture Video Service Encoding Plus (EN8000/SWO/PIP-PLUS)

- Simultaneous encoding of low resolution version of main video service
- Enables SD simulcast of the HD input
- MPEG-4 AVC real-time encoding
- User selectable resolution and bitrate
- Single box solution for PIP functionality in IPTV applications
- Supports PIP service from 96 x 96 up to full resolution SD

Simultaneous SD MPEG-2 encoding (EN8000/SWO/MPEG2)

- Enables an additional SD MPEG-2 encoder to allow simultaneous encoding of the SD input

HARDWARE OPTIONS

Dual Port IP Transport Stream Output (EN8000/HWO/IPTSDUAL)

- UDP/IP or RTP/UDP/IP encapsulation of MPEG-2 transport stream output
- Dual port 100/1000BaseT Ethernet physical interface
- CBR or VBR multicast outputs
- Multicasts MPTS transport stream from encoder, or can split services into individual SPTS for multicasting
- User configurable network and multicast parameters


Advanced Audio Encoder Module (EN8000/HDC/AUD)

- Advanced audio processing module enables additional stereo audio encoding with appropriate licensing
- Pass-through audio support, including glitch suppression on Dolby Digital® (AC-3) pass-through services
- Hardware future-proofing for future audio encoding and transcoding requirements

Range of ATM Outputs (M2/EOM2/ATMS34, M2/EOM2/ATMS45, M2/EOM2/ATMS155)

- Range of ATM outputs to support AAL-1 & AAL-5

SAMPLE CONFIGURATION

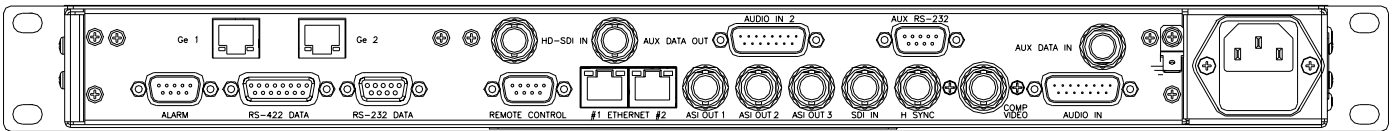

SPECIFICATIONS

Inputs

HD Video

HD-SDI serial digital video with EDH error detection and health monitoring

SD Video

SDI serial digital video with EDH error detection and health monitoring

Composite video (PAL/NTSC)

SDI component 625 and 525 line standard supported

Audio

2 stereo pairs input via analog audio balanced 600Ω/20kΩ or AES-EBU

Up to 4 stereo pairs can be de-embedded from SD SDI and up to 8 stereo pairs from the HD-SDI

Studio Reference

625 and 525 line HSYNC

Video Encoder

MPEG-4 AVC HD Video Compression

High profile compliant at level 4 (HP@L4)

1 Mbits/s to 20 Mbits/s

MPEG-4 AVC SD Video Compression

Main profile at level 3 (MP@L3)

0.250 Mbit/s to 10 Mbit/s, depending on resolution

Picture-in-Picture (option)

MPEG-4 AVC MP@L3 Progressive encoding

User selectable resolution and bitrate

Supported Video Resolutions

HD Operation

1080 x 1920/1440/1280/960i 25

1080 x 1920/1440/1280/960i 29.97

720 x 1280/960/640p 50

720 x 1280/960/640p 59.94

SD Operation

576 lines x 720/704/640/576/544/528/480/352 pixels

480 lines x 720/704/640/576/544/528/480/352 pixels

288 lines x 352/320 pixels

240 lines x 352/320 pixels

Audio Encoder

MPEG-1 Layer II, up to 2 stereo pairs

Dolby Digital® (AC-3) (option), up to 6 stereo pairs

MPEG-2 AAC-LC (option), up to 6 stereo pairs

MPEG-4 HE-AAC v1 (option), up to 4 stereo pairs or 1 x 5.1 and 1 stereo pairs

MPEG-4 HE-AAC v2 (option) up to 4 stereo pairs

MPEG-4 AAC-LC 5.1 (option)

Advanced Video Pre-processing

TANDBERG Clarus™ adaptive spatial and temporal noise reduction (option) and input de-blocking filters (option)

Closed captioning extraction via SMPTE 334

Image resizing (multiple resolutions)

Features

Easy-to-use front panel control

Web based control

TANDBERG nCompass Control

Accurate bitrate control

No frame loss guarantee

Physical and Power

Dimensions (W x D x H)

442.5 x 545 x 44.5mm (17.5" x 20.7" x 1RU)

Approximate Weight

7.5kg

Power Input

100 – 120 Vac or 220 – 240 Vac wide ranging, or -48Vdc

Environmental Conditions

Operating Temperature

-10°C to 50°C (14°F to 122°F)

Compliance

CE marked in accordance with EU Low Voltage and EMC Directives

EMC Compliance: EN55022, EN55024, AS/NZS3548, EN61000-3-2 and FCC CFR47 Part 15B Class A

Safety Compliance: EN60950, IE60950



Mike Termond

Phone: 1.805.649.1384

Fax: 1.500.4328

Email: Mike@satcom-services.com